


4CH-RF Smart Switch

Model : 85-250V 4CH RF Switch
Model : 85-250V 4CH RF Module
Model : 85-250V 4CH Module




Parameters:
Input voltage: DC5V/AC 85V~250V
Max.Current: 2200W/10A/ Gang
Max.load: 3500W/16A / 4Gang
Wi-Fi Standard: Wi-Fi 2.4ghz b/g/n
Working temperature:-20℃~70℃
Working humidity:≤80%
Material:ABS
Size:134*79*28mm

Checklist before using the device

- Your smart phone or tablet has connected to a 2.4g WiFi with internet.
- You have the correct WiFi PWD.
- Your smart phone or tablet must have access to APP store,Google play.
- Your router is MAC-open.

User Guide


- 1 Start with "EWelink" APP.



- 2 Register an EWelink account.
- 3 If you have EWelink account, just login.
- 4 Power up.

Add device flow to mobile APP

- 1 After installation,power the device and hold the pairing button for 7 seconds. The red lights flashed and the match began.

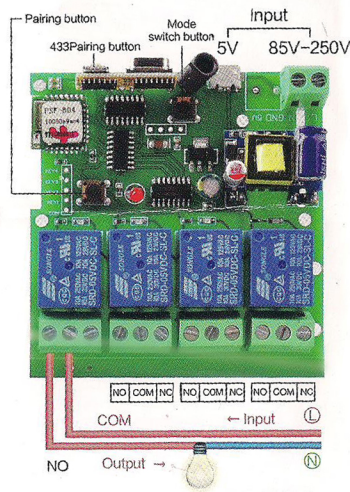

- 2 Tap + on EWelink app.


- 3 Fast mode is preferred in (Touch) special cases You can try compatibility Model (AP)



- 4 Input your WiFi password.



- 5 Name your device.



- 6 When the WiFi LED Is on,the device is online.
- 7 Click the on/off buttons on the APP can control device,Manual control switch also can be display real-time on the APP.

Remote control matches the code

- Matching:**
- 1 hold 433 matched button for 3 seconds, the red light flashing
 - 2 long press any keys match
 - 3 loosen the remote control buttons, matching success


Clear code:
Long press 433 pairing button 8 seconds, red light goes out, namely clear code success!

* note: the matching/clear code method is only available with RF function switch/module reference.

TROUBLESHOOTING

Solutions for the failure of product matching and offline:

Enter the homepage of App,click the icon in the lower right corner of the interface to enter.
"User center" >hits" FAQ".

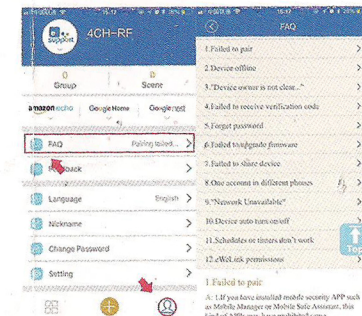

If none of the above is resolved,please open it with another phone.Personal hotspot,try to read.